



ZHEJIANG HANGCHA IMP. & EXP. CO., LTD.

**Factory site:** 666 Xiangfu Road,  
Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755  
Fax: +86-571-88926789 88132890

sales@hcforklift.com  
www.hcforklift.com



Follow us on  
Facebook



Follow us on  
YouTube



Follow us on  
WeChat



Download "Hangcha  
Forklift" App



HANGCHA trucks conform  
to the European Safety  
Requirements.

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.

2023 VERSION 1/COPYRIGHT 2023/06



# XC SERIES REACH TRUCK WITH LITHIUM POWER

with capacity of 1,000 to 1,200kg



*The World of Hangcha*  
SINCE 1956





# A NEW DIMENSION OF PERFORMANCE

## XC SERIES REACH TRUCK WITH LITHIUM POWER

- / The XC series reach truck with lithium power fully utilize the advantages of lithium battery and achieve disruptive innovations in vehicle structure, functional configuration, performance parameters, ergonomics, and operating vision.
- / We cater for a wide range of applications whilst ensuring optimum energy efficiency. Regardless of your special requirements – whether confined spaces or lifting height reaches 7m, load capacity of up to 1,200 kg or individual customisation with various options – we have the truck you need.
- / Compact size of the lithium battery pack and breaking through the traditional structure design, makes the truck style more novel and more efficient.

MAXIMUM TRAVELLING SPEED

**14km/h**

MAXIMUM LOAD CAPACITY

**1,200kg**

MAXIMUM LIFTING SPEED

**0.7m/s**

MAXIMUM LIFT HEIGHT

**7,000mm**







# MORE VISION MORE CONTROL



The compact mast design enables operator have a wider view around the outside of the mast.

The middle cylinder is arranged eccentrically to enable the driver to have a wider view around the inside of the mast.

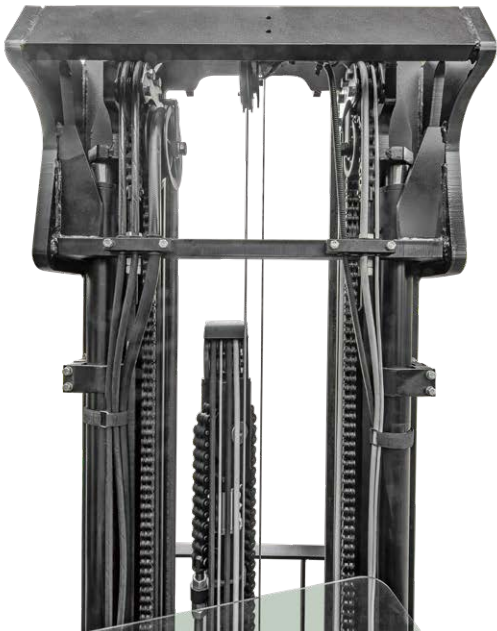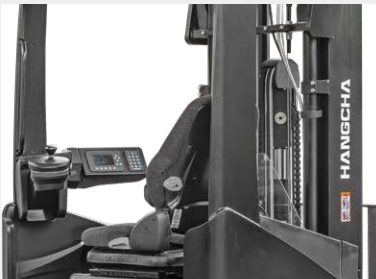

## The improved mast structure and piping arrangement enables a broader vision for stacking operations

/ The hydraulic tubing and the wires are on both sides of the mast, overlapping with the chain, making full use of the space and reducing the line of sight.

## Efficient and durable

- / CATL lithium battery is standard for all series, adopting 80V voltage system which can provides fast charging and long service life and less energy loss.
- / The special-shaped lithium battery pack design provides a large operating space in the cab and a broad view.

Lithium battery capacity		
1.0 t	Std.	80V/125Ah
1.2 t	Opt.	80V/228Ah



Charging port



Battery removal





# EXCELLENT ERGONOMIC DESIGN



Steering wheel position can also be adjusted



The pedal height can be adjusted electrically(Optional)

Integral suspended seat

Dashboard angle adjustment





# MULTIFUNCTIONAL INTERACTIVE COLOR-SCREEN INSTRUMENTS

The new multifunctional 4.3 inch color-screen instruments developed for the XC series reach truck have easier human-machine interfaces.



## More status indication



- ①  
1. Lifting height  
2. Local time  
3. Load weight
- ②  
1. Driving mode  
2. Fork action  
3. Operating time  
4. Maximum allowable lifting height
- ③  
1. Steering mode  
2. Battery power  
3. Travelling speed
- ④  
Various status signs and warning signs are displayed in a queue according to actual needs

## More convenient shortcut button

Thanks to the integrated design of the instrument function buttons, the truck console saves a lot of physical buttons, making it more concise and efficient.




- ⑤  
Height selection
- ⑥  
Height limit
- ⑦  
Lighting control
- ⑧  
Battery removal
- ⑨  
Optional function switching screen
- ⑩  
↑ Button Driving mode switching
- ⑪  
↓ Button Turtle speed mode



# SAFETY FROM EVERY ANGLE

## Drive control limit

Drive control limits the travelling speed and traverse speed as soon as the forks are raised. This increases the safety when manoeuvring with a raised pallet in front of the storage rack, while still ensuring more sensitive manoeuvring during the work cycle.

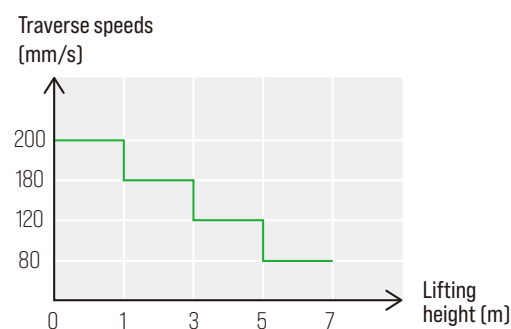

**Note:** The above table is only for 1.0/1.2t, the parameters of other models are not the same.



# EASY MAINTENANCE

The battery pack can be replaced quickly. The driver can unlock and remove the battery while sitting on his seat.

Remove battery pack step



The seat can be turned open at a large angle, which is convenient for maintenance work.

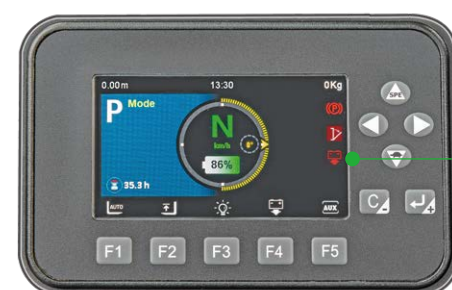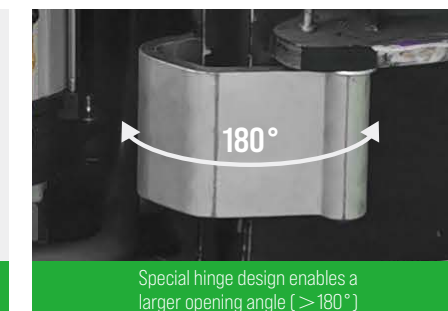

The battery is in an inappropriate position and the indicator light is lit

## Battery lock with creep speed interlock

Installed on the battery latch in the motor compartment. Monitors the locking of the battery pack. If the battery pack is not retracted or not locked, travel is restricted to creep speed.








### Height selection

Multiple heights can be pre-set on the instrument. After the function is enabled, when the fork is about to be lifted to the preset height, the lifting speed will gradually slow down and the fork will finally stop at the set height steadily.

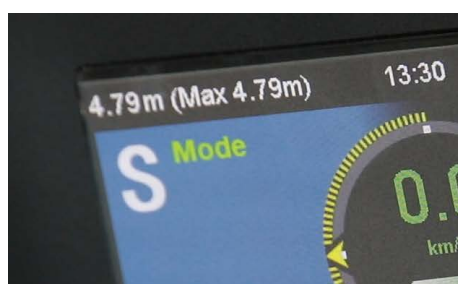

### Height limit

After this function is enabled, when the fork is lifted to a certain height, this height will be set as the maximum allowable lifting height. Afterwards, whenever the fork is about to be lifted to this height, the lifting speed will gradually slow down and the fork will steadily finally stop at this height.



Faster, easier and safer  
stacking and retrieval  
operations


# COMPREHENSIVELY IMPROVED FUNCTION CONFIGURATION







# WE GIVE YOU ALL THE OPTIONS

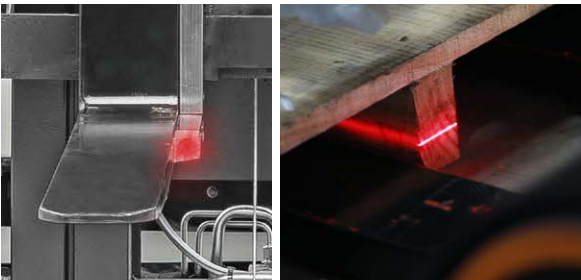

### Easier stacking and retrieval with positioning laser

Our positioning lasers significantly simplify the stacking and retrieval process and increase the safety for load and rack. The laser sources are integrated into the fork tips, projecting a red line on the area ahead. This allows the operator to adjust the fork more accurately to be able to drive effortlessly into the pallet.



### Safety at any blind spots with Floor Spot

Floor Spot projects a blue dot on the floor around the truck. Especially at blind intersections or at the end of rack aisles, the Floor Spot alerts an approaching truck in time to respond.



### Easy access

Easy access protects the reach truck against unauthorised use. Authorisation management is directly controlled via the truck's display. Customised to your requirements and company size – you can choose between the key( Std.), PIN code and transponder.



### 100% clear view thanks to panorama roof panel

Maximum visibility: The panorama roof panel without cross beams provides maximum visibility of the goods and forks.



### Stacking and retrieval via video monitoring

Our video camera allows for the precise and quick access of extremely high locations. The position of the camera on the forks enables operators to efficiently and reliably control stacking and retrieval operations from their seating position/viewpoint. They no longer have to look up, which noticeably reduces the strain on their shoulders and neck. Also, information on the pallets is easily visible, even at great heights.

## Features

NO.	System	Features	CQD10/12-XC5-SI
1	Control	Control with a mechanical control lever	●
2		Height display	○ (Only for triplex mast, excluding the free lift range)
3		Height selection	○ (Only for triplex mast, excluding the free lift range)
4		Height limit	○ (Only for triplex mast, excluding the free lift range)
5		Mast reach damping system	●
6		Soft landing system	●
7		Lifting damping system	●
8		Drive control limit	●
9		Battery lock with creep speed interlock	●
10		Travelling speed control at corner	●
11		180° steering mode	●
12		360° steering mode	○
13	Transmission system	ZF transmission	○
14	Electronic accessories	USB power socket	●
15		Fork positioning laser	○
16		Video monitoring	○
17		Keyed start	●
18		Start with a PIN code or by a card	○
19		Beep	○
20		Operating light (in the direction of the fork)	●
21		Operating light (in the reverse direction of the fork)	○
22	Ergonomic design	Alarm light	●
23		Blue light	○
24		Three-sided one line laser projection light	○
25	Fault Diagnosis	Electrical adjustment of pedal height	○
26		Adjustable steering wheel	●
27		Instrument angle adjustment	●
28	Seat	Suctioned oil filter clogging alarm	○
29		Backflow oil filter clogging alarm	○
30		Sequential Seat Belt Interlock System	●
31	Other	BF6-3 suspension seat	●
32		MSG65/522 suspension seat	○
33		Panorama roof	○
34		PVC ceiling	○
35		Curved rearview mirror	○
36		Left and right rear view mirrors	○
37		Cold storage	○
38		Load backrest	●
39		Fire extinguisher	○
40		Electric fan	○
41		OPS system	●

Note: ● Standard; ○ Optional