

SPECIFICATION



TELETRUK | 35-23D - 35-26D

Max capacity: 3500kg Max capacity at 2m forward reach: 2300-2600kg Max lift height: 4400mm




REACH FURTHER WITH JCB TELETRUK.

The NEW Stage V JCB Teletruk range provides unrivalled forward visibility, forward reach and large lift capacity, dramatically improving safety, while saving time, space and money. Offering three 2WD options (30-19D, 30-20D HL & 35-23D) and two 4WD options (30-23D & 35-26D), the diesel Teletruk range is built to reach further in logistics, construction, waste and agriculture.

REACH FOR PRODUCTIVITY.

The Teletruk is designed to make the most of your time and space, with its unique telescopic boom, small turning circle and single side loading.

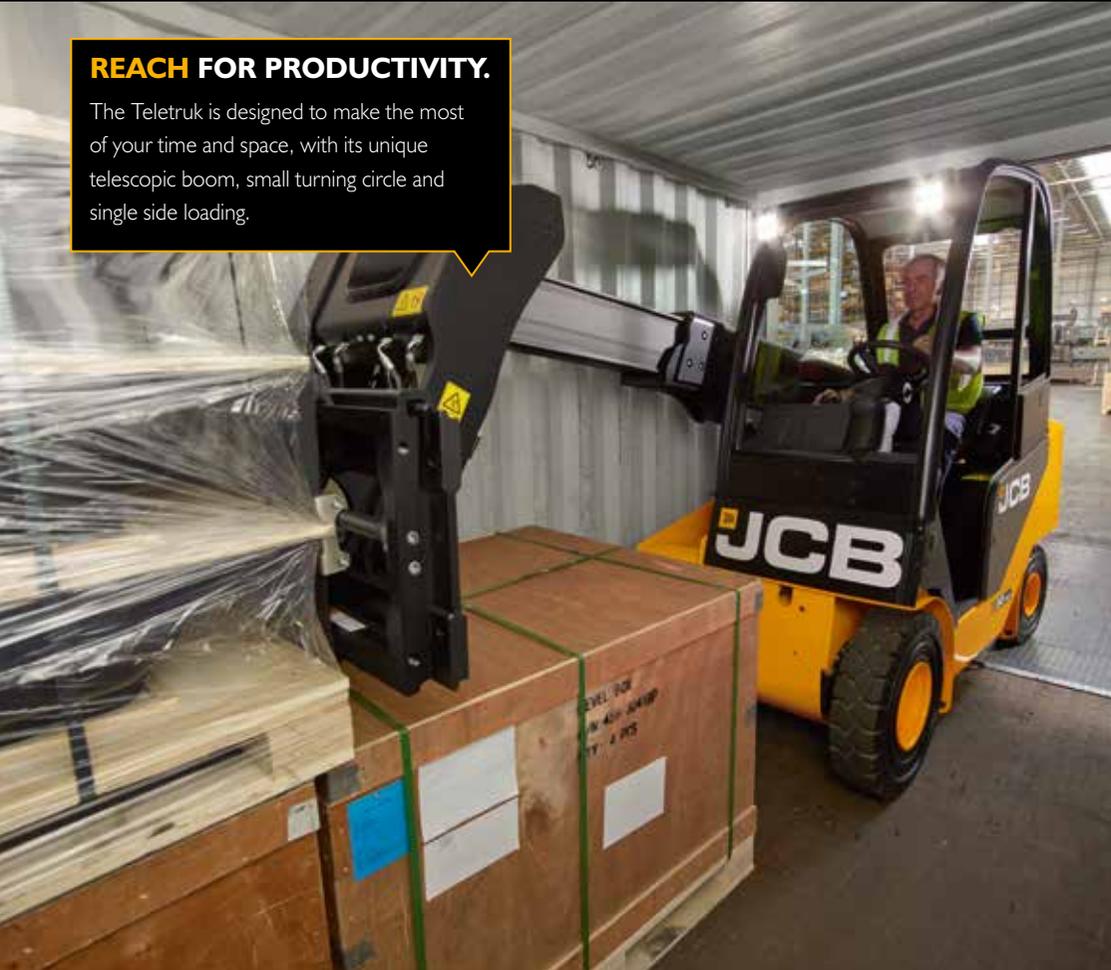

REACH FOR GREATER SAFETY.

With superb visibility, precision control and unique design features, the Teletruk reaches new heights of safety, making all operators feel in total control.

REACH FOR GREATER VERSATILITY.

Four wheel drive delivers four tonnes of tractive effort, to support bucket work, travelling over rough ground and up to 21% gradients.




REACH FOR GREATER EFFICIENCY.

The JCB Teletruk's unique boom enables the operator to reach into the second or third row of materials improving efficiency and safety.

REACH FOR GREATER COMFORT.

The JCB CommandPlus cab ensures superior operator comfort, enabling you to gain maximum productivity from this uniquely versatile machine.

STATIC DIMENSIONS

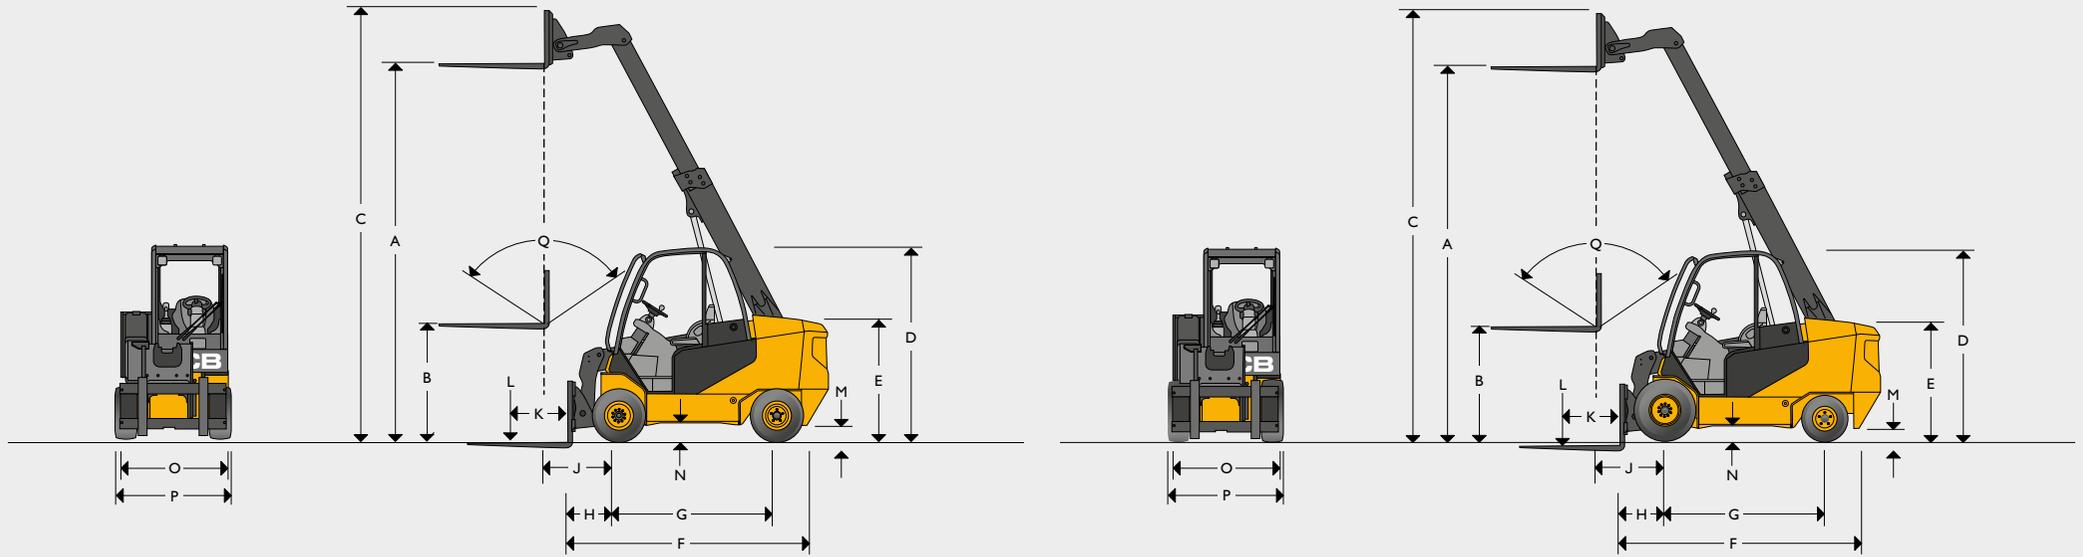


STATIC DIMENSIONS

Model	35-23D	35-26D 4x4
A Lift height mm	4400	4350
B Free lift (standard) mm	1410	1350
C Height (boom extended) mm	4975	5150
D Height of overhead guard (standard/low) mm	2220/2140*	2320/2240
E Height of operators seat mm	1140	1250
F Length to fork face mm	3106	3106
G Wheelbase mm	1950	2060
H Distance from c/l of front axle to fork face mm	529	529
J Distance from c/l of front axle to fork face (full height) mm	729	729
K Load centre mm	500	500
L Lift capacities (with sideshift) kg	3500	3500
M Ground clearance (lowest point) mm	103	167
N Ground clearance (wheelbase centre) mm	129	177
O Fork carriage width mm	1200	1200
P Maximum width of machine mm	1300	1410
Q Carriage tilt total degrees	111	111

* Low option only available on construction and waste models.

LIFT CAPACITIES

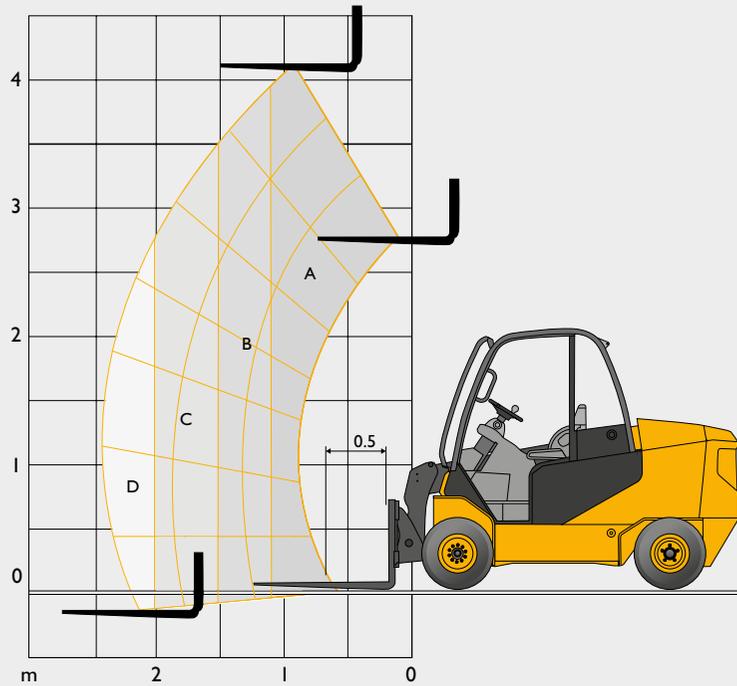

Capacity bands	35-23D
A	3500kg
B	3000kg
C	2300kg
D	1750kg
@ 2 metres	2300kg

Capacity bands	35-26D 4x4
A	3500kg
B	3000kg
C	2600kg
D	2050kg
@ 2 metres	2600kg

GENERAL SPECIFICATION

Model	35-23D	35-26D 4x4
Engine manufacturer	Kohler	Kohler
Tier compliant	STV	STV
Engine model	KDI2504	KDI2504
Engine output (gross power)	46kW @ 2600RPM	46kW @ 2600RPM
Cubic capacity	2504 cm ³	2504
Rated RPM	2600	2600
Number of cylinders	4	4
Working pressure attachments	170 bar	170
Oil flow for attachments (standard / high)	28/70 lpm	28/70
Maximum reach ground level (500mm load centre)	2230 mm	2230
Maximum reach boom horizontal (500mm load centre)	2390 mm	2390
Turning radius mm	2885 mm	3500
Aisle width 90 stacking 800x1200/1000x1200	4480/4680 mm	5060/5260
Weight unladen	5600 kg	5980
Travel speed (standard)	20 kph	20
Gradeability (unladen)	21 kph	23
Transmission	Hydrostatic	Hydrostatic
Park break type	Hand	Hand
Shovel rated capacity	0.6 m ³	0.6
Shovel struck capacity	0.5 m ³	0.5
Shovel dump height (30)	2680 mm	2680
Shovel rollback angle at ground	37 degrees	33
Shovel width	1385 mm	1385
Tyres PPS (Semi solid) P (Pneumatic)	PPS/P	PPS/P/FOAM
Tyre size front (standard)	27 x 10 x 12	27 x 10 x 12
Tyre size rear (standard)	23 x 9 x 10	27 x 10 x 12
Diesel tank capacity litres	50 litres	49



ONE COMPANY, OVER 300 MACHINES.

Your nearest JCB dealer

Teletruk 35-23D - 35-26D

Max capacity: 3500kg Max capacity at 2m forward reach: 2300-2600kg Max lift height: 4400mm

JCB Sales Limited, Rokester, Staffordshire, United Kingdom ST14 5JP.

Tel: +44 (0)1889 590312 Email: salesinfo@jcb.com

Download the very latest information on this product range at: www.jcb.com

©2021 JCB Sales. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB Sales. All references in this publication to operating weights, sizes, capacities and other performance measurements are provided for guidance only and may vary dependant upon the exact specification of machine. They should not therefore be relied upon in relation to suitability for a particular application. Guidance and advice should always be sought from your JCB Dealer. JCB reserves the right to change specifications without notice. Illustrations and specifications shown may include optional equipment and accessories. All images are correct at time of print. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.

